


Adapter; precision; R 740 to 1.35 mm socket | BN 533127

A photo of the product
is to be placed here.

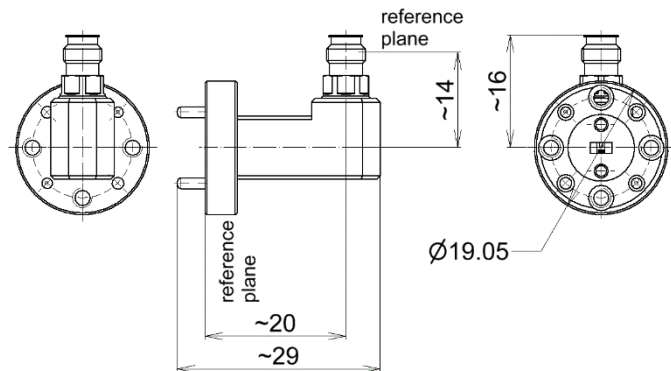

all dimensions in millimeter

Radio frequency characteristics

Waveguide interface aperture	R 740 per IEC 60153-2 (WR 12 per EIA RS-261)
Waveguide interface mechanics	UFC 740 per IEC 60154-2 compatible to M3922/67-009 (UG387/U)
Coaxial interface type	1.35 mm socket (50 Ω) per IEEE Std 287
Frequency range	60 to 90 GHz (E-band)
Return loss, min. / typ.	16 dB / 20 dB
Insertion loss, max.	0.7 dB

Mechanical characteristics

Inner conductor material / surface coating	CuBe age hardened / gold-plated
Outer conductor material / surface coating	CuBe / gold-plated copper alloy / gold-plated
Other parts material / surface coating	stainless steel
Weight, approx.	25 g
Marking	laser engraving

Environmental conditions

Operation	
Ambient temperature range	+18 to +28°C
Relative humidity, max.	95% (non-condensing)
Storage	
Ambient temperature range	-40 to +70°C
Relative humidity, max.	95% (non-condensing)

Scope of delivery and accessories

Scope of delivery	protective caps, socket-head cap screws no. 4-40 UNC
-------------------	--