


Line section; Precision Air Line, bead-supported || BN 533693

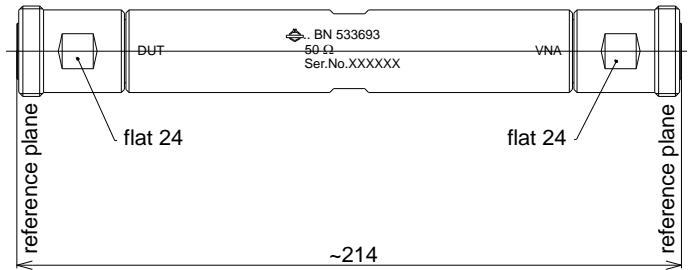

all dimensions in millimeter

**Radio frequency characteristics**

Interface type	
DUT	7-16 socket per IEC 61169-4
VNA	7-16 socket per IEC 61169-4
Frequency range	DC to 7.5 GHz
Impedance	50 Ω ± 0.07 Ω
VSWR (mated pair of lines, DUT-sides connected, TDR gated)	≤ 1.004 + 0.0016 x f [GHz]

**Mechanical characteristics**

Center conductor material / surface finish	CuBe age hardened / gold-plated copper alloy / gold-plated
Outer conductor material / surface finish	copper alloy / gold-plated
Insulation	cross linked polystyrene
Weight, approx.	0.7 kg

**Environmental conditions**

<b>Operation</b>	
Ambient temperature range	+18 to +28°C
<b>Storage</b>	
Ambient temperature range	-40 to +70°C

**Scope of delivery and accessories**

Scope of delivery	protective caps
-------------------	-----------------

SPINNER GmbH  
 This document is proprietary to us.  
 All rights reserved. Any use, transfer, or reproduction of this document  
 or the know-how contained therein requires our express consent.

Template TD-00003A