


Note:

This layout is optimized for high frequency laminate type RT/duroid 5870, thickness 0.127 mm, 17 μ m electrodeposited copper foil on both sides.

Suitable for all types of PCB-Launch-Connectors SPINNER *EasyLaunch*

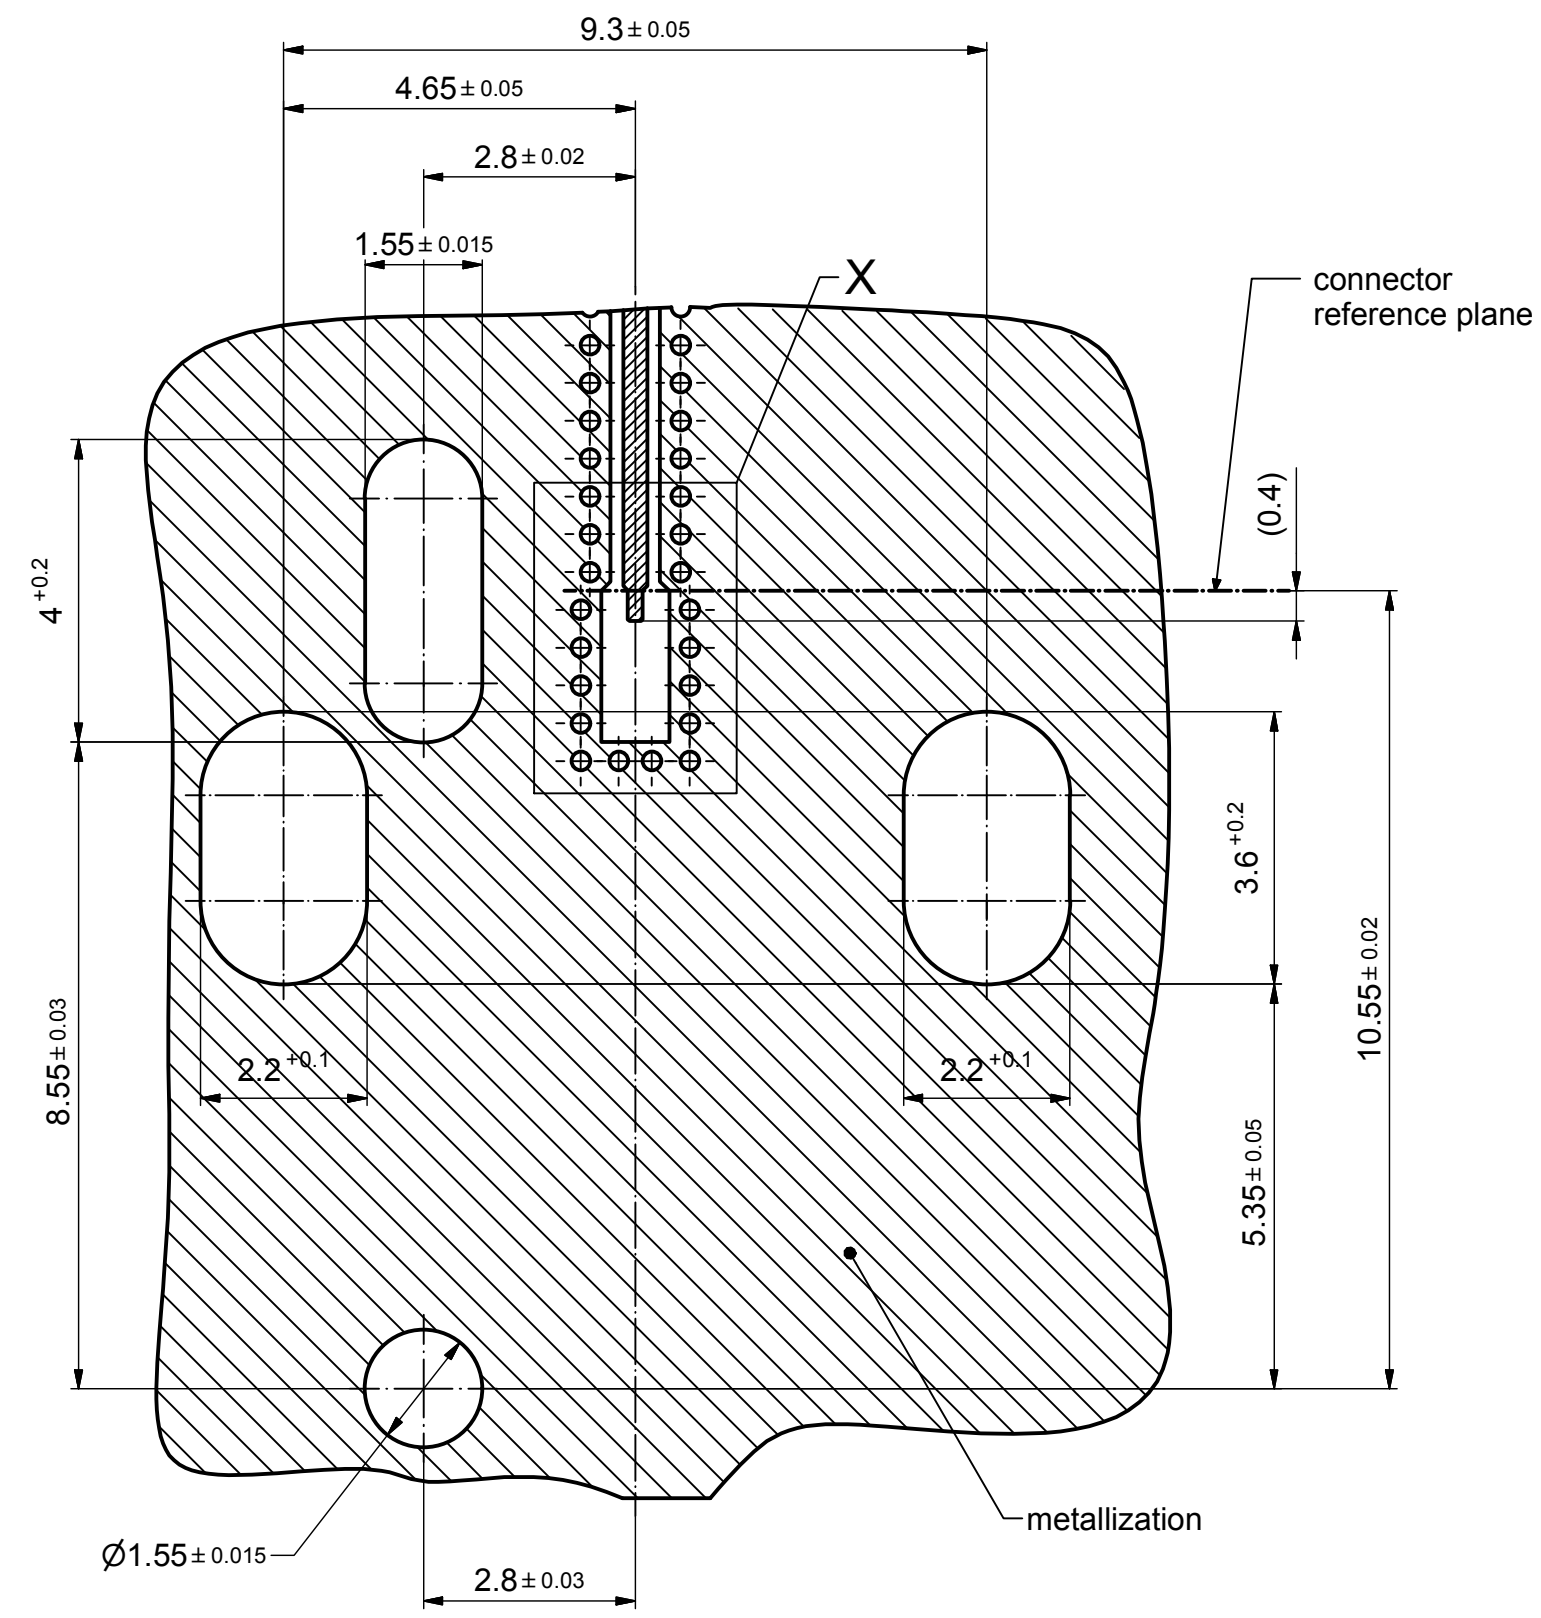

| | | | | | |
|---|-------------------------|--------------------------------|-----------------|---|---|
| Maßangaben in mm Dimensions in mm | | Projektion E: Projection E: | | Maßstab: / Scale: 10 : 1 | |
| Allgemeintoleranzen: General tolerances: | | DIN ISO 2768mH | Datum: Date: | Name: Name: | Bezeichnung: Title: |
| Erstellt: Creator: | | 02.05.2016 | Niebauer | | Layout printed circuit board for Launch Connector |
| Geprüft: Checked: | | 02.05.2016 | Niebauer | | |
| Inter: Revision: | Änd.-Nr.: Issue-No.: | Datum: Date: | Name: Name: | Zeichnungs-Nr.: Drawing-No.: | |
| A Startindex 02.05.2016 Niebauer | | | | Spinner GmbH Ergzessereistr. 33 D-80335 München | |
| | | | | A96360-0E | |
| | | | | Format: Format: | |
| | | | | Blatt: Sheet: 1 | |
| | | | | von: of: 1 | |