


## Adapters (50 Ohms)

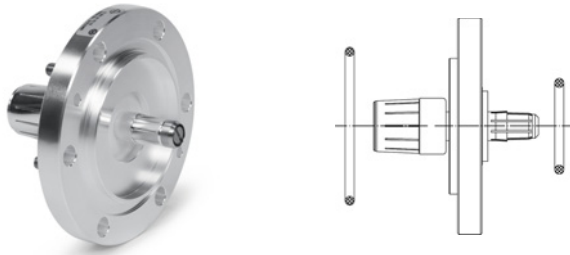


### Adapters - Short

Part Number	Connector 1	Connector 2	Frequency Range	VSWR	Length L	Weight
<b>BN 107410</b>	1 5/8" EIA male	7-16 female	0 - 860 MHz	≤ 1.02	35 mm	≈ 0.61 kg
<b>BN 912110</b>		7/8" EIA male			24 mm	≈ 0.83 kg
<b>BN 917510</b>	3 1/8" EIA male	1 5/8" EIA male	0 - 860 MHz	≤ 1.02	15 mm	≈ 2.01 kg
<b>BN 715010</b>	4 1/2" EIA male <sup>1</sup>	3 1/8" EIA male	0 - 860 MHz	≤ 1.02	22 mm	≈ 1.50 kg
<b>BN B03617</b>	52-120 BT male	7-16 female	0 - 860 MHz	≤ 1.02	92 mm	≈ 3.50 kg
<b>BN 909404</b>	6 1/8" EIA male	7-16 female	0 - 860 MHz	≤ 1.02	110 mm	≈ 6.51 kg
<b>BN 918910</b>		3 1/8" EIA male			36 mm	≈ 5.73 kg
<b>BN 714910</b>		4 1/2" EIA male			40 mm	≈ 6.28 kg

Scope of supply includes O-rings and screw set made of stainless steel.

<sup>1</sup> 339 IEC 50-105

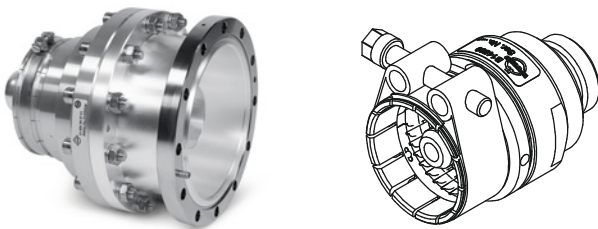

### Adapters - Unflanged

Part Number	Connector 1	Connector 2	Frequency Range	VSWR	Length L	Weight
<b>BN 918330</b>	1 5/8" SMS inner	1 5/8" MYAT cutback	0 - 860 MHz	≤ 1.04	61 mm	≈ 0.08 kg
<b>BN B14500</b>	1 5/8" SMS clamp	7-16 female	0 - 860 MHz	≤ 1.04	79 mm	≈ 0.45 kg
<b>BN 918730</b>	3 1/8" SMS inner	3 1/8" MYAT cutback	0 - 860 MHz	≤ 1.04	75 mm	≈ 0.16 kg
<b>BN B18263C0001</b>	3 1/8" SMS clamp	7-16 female	0 - 860 MHz	≤ 1.04	111 mm	
<b>BN B18263</b>	NAX 77 clamp	7-16 female	0 - 860 MHz	≤ 1.04	109 mm	
<b>BN B11010</b>	RL98 cutback A	3 1/8" EIA male	0 - 860 MHz	≤ 1.04	138 mm	≈ 2.0 kg
<b>BN B11010C0001</b>		3 1/8" EIA			98 mm	≈ 2.0 kg
<b>BN B08333</b>		43-98 BT male			90 mm	
<b>BN 715002</b>	4 1/2" SMS clamp	4 1/16" MYAT male	0 - 860 MHz	≤ 1.04	143 mm	
<b>BN B25971</b>	4 1/2" EIA	RL98 cutback A	0 - 860 MHz	≤ 1.04	101 mm	
<b>BN B11310</b>	RL120 cutback A	4 1/2" EIA	0 - 860 MHz	≤ 1.04	185 mm	≈ 6.9 kg
<b>BN B03617C0001</b>	NAX 120 clamp	7-16 female	0 - 860 MHz	≤ 1.04	153 mm	≈ 1.5 kg
<b>BN B03617C0000</b>	52-120 SMS clamp	7-16 female	0 - 860 MHz	≤ 1.04	172 mm	≈ 1.5 kg
<b>BN B22055</b>		NAX 120 unflanged	0 - 860 MHz	≤ 1.04	210 mm	≈ 5.0 kg
<b>BN 542720C0001</b>	6 1/8" EIA	4 1/2" EIA	0 - 860 MHz	≤ 1.04	268 mm	≈ 7.0 kg
<b>BN 542701</b>		52-120 SMS clamp	0 - 860 MHz	≤ 1.04	245 mm	≈ 9.5 kg