


PORT SAVER || BN 533917C0001

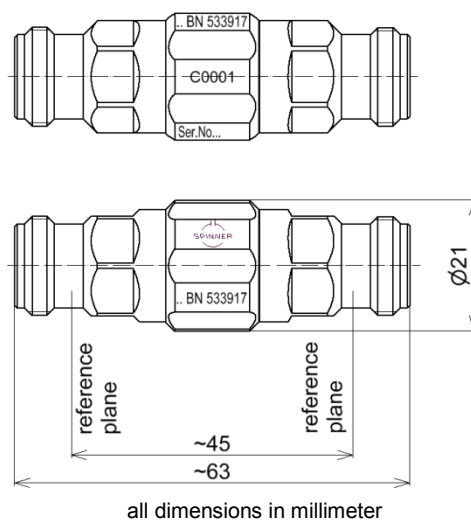

**Radio frequency characteristics**

Interface type	N socket / socket per IEC 61169-16
Frequency range	DC to 18 GHz
Impedance	50 $\Omega$
Return loss, min.	38 dB @ DC to 4 GHz 34 dB @ 4 to 8 GHz 28 dB @ 8 to 18 GHz

**General mechanical data**

Center conductor material / surface finish	CuBe age hardened / gold-plated
Outer conductor material / surface finish	copper alloy/ gold-plated
Insulation	PMP
Weight, approx.	0.1 kg
Marking	laser engraving

**General environmental conditions**

<b>Operation</b>	
Ambient temperature range	+18 to +28°C
<b>Storage</b>	
Ambient temperature range	-40 to +70°C
Relative humidity	95% (non condensing)

**Delivery**

Packaging	transparent plastic tube
-----------	--------------------------