


Precision Load || BN 876784

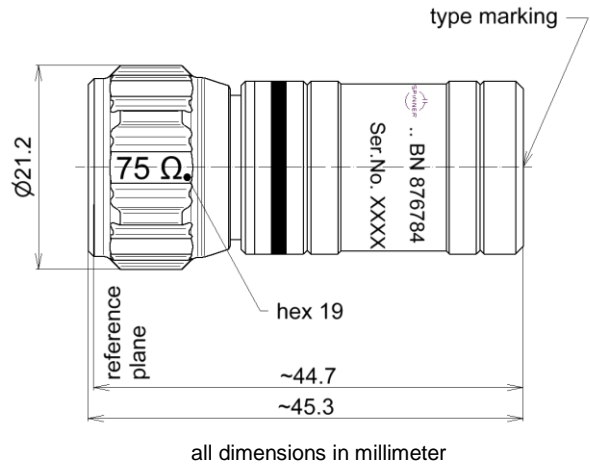

**Radio frequency characteristics**

Interface type	N plug (75 Ω) per IEC 61169-16
Frequency range	DC to 3 GHz
Impedance	75 Ω
DC-resistance	75 Ω ± 0.75 Ω
Return loss, min.	36 dB @ DC to 3 GHz
Power rating, max.	0.5 W

**Mechanical characteristics**

Center conductor material / surface finish	CuBe age hardened / gold-plated
Outer conductor material / surface finish	copper alloy / CuSnZn-plated
Insulation	cross linked polystyrene
Other metallic parts / surface finish	copper alloy / nickel-plated stainless steel
Weight, approx.	0.06 kg
Marking	laser engraving

**Environmental conditions**

<b>Operation</b>	
Ambient temperature range	-10 to +55°C
<b>Storage</b>	
Ambient temperature range	-40 to +70°C
Relative humidity	95% (non-condensing)

**Scope of delivery and accessories**

Scope of delivery	certificate of calibration, handling instructions
-------------------	---

SPINNER GmbH  
 This document is proprietary to us.  
 All rights reserved. Any use, transfer, or reproduction of this document  
 or the know-how contained therein requires our express consent.