


Rotary Joint || BN 549758C2007

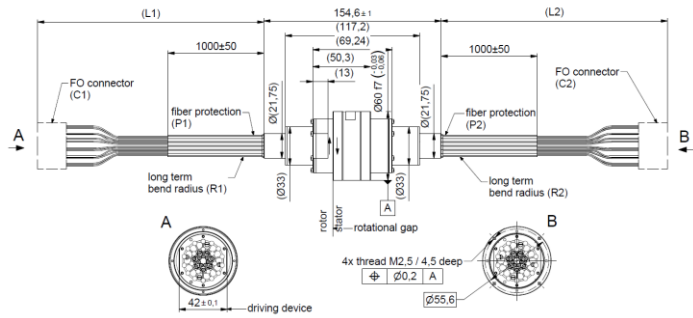

all dimensions in millimeter

Fiber optic channel characteristics

Channels	20 CH	
Channel designation	1 to 20	
Fiber type	Singlemode E9 / 125 μm	
Side	Rotor	Stator
FO connector (C1 / C2)	Amphenol TFOCA-III® Terminus "FSAF1100_"	Amphenol TFOCA-III® Terminus "FSAF1100_"
Fiber protection (P1 / P2)	cable 3 mm (length acc. to drawing), 900 μm buffer on full length of fiber	cable 3 mm (length acc. to drawing), 900 μm buffer on full length of fiber
Fiber length (L1 / L2)	1500 ±150 mm	1500 ±150 mm
Long term bend radius, min. (R1 / R2)	30 mm	30 mm
Wavelength	1310 nm / 1550 nm	
Average power capability, max.	200 mW / 23 dBm	
Return loss, min.	45 dB <sup>*)</sup>	
Insertion loss, max.	4.5 dB <sup>*)</sup>	
Insertion loss variation over rotation, max./ typ.	1.5 dB / 1.0 dB	
Cross talk, min.	50 dB (between all channels)	

<sup>\*)</sup> measured with standard connector

SPINNER GmbH  
 This document is proprietary to us.  
 All rights reserved. Any use, transfer, or reproduction of this document  
 or the know-how contained therein requires our express consent.

Rotary Joint || BN 549758C2007

**Mechanical characteristics**

Rotating speed, max. / nominal	150 rpm / 100 rpm
Life, min.	200 x 10 <sup>6</sup> revolutions
Torque (room temperature), max.	0.15 Nm @ rotation
Interface loads, max.	±0.4 Nm bending moment
Case material	stainless steel and copper alloy, corrosion resistant
Case surface finish	no finish
IP protection level	IP50 per EN 60529 (all interfaces connected with appropriate gaskets)
Weight, approx.	1.5 kg
Marking	adhesive label (SPINNER logo)

**Environmental conditions**

<b>Operation</b>	
Ambient temperature range	-40 °C to +85 °C
Relative humidity, max.	95% (non-condensing)
<b>Storage</b>	
Ambient temperature range	-40 °C to +85 °C
Relative humidity, max.	95% (non-condensing)

**Applicable documents**

Technical information	"Rotary Joints – Glossary", Technical Document TD-00021, Spinner GmbH
-----------------------	---

This document is proprietary to us. All rights reserved. Any use, transfer, or reproduction of this document or the know-how contained therein requires our express consent.

SPINNER GmbH  
 Template TD-00002U