

Bandpass Filter TETRA RX

Connectors

7-16 female (50 Ohms)

Frequency range

Passband 380 – 385 MHz

Insertion loss

Passband ≤ 0.5 dB

Isolation

TX Band	390 – 395 MHz	≥ 30 dB
GSM 900	890 – 960 MHz	≥ 50 dB

VSWR

≤ 1.25

Power rating

200 W

Intermodulation products

3rd order @ 2 x 20 W ≤ -150 dBc | typical: ≤ -160 dBc

Degree of protection

IP 54 (indoor)

Weight

1.7 kg

Wall / Mast mounting


to be ordered separately under BN B07787

Temperature range

-5 – +60 °C

Appendix

Dimensions	VSWR Insertion loss Isolation
------------	-------------------------------------

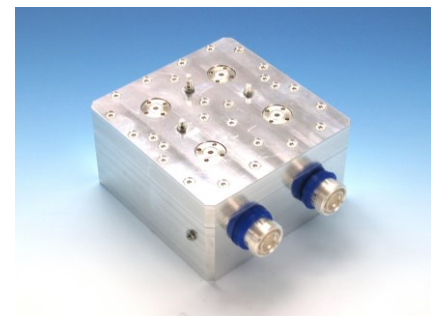


not binding




Block Diagram

Dimensions

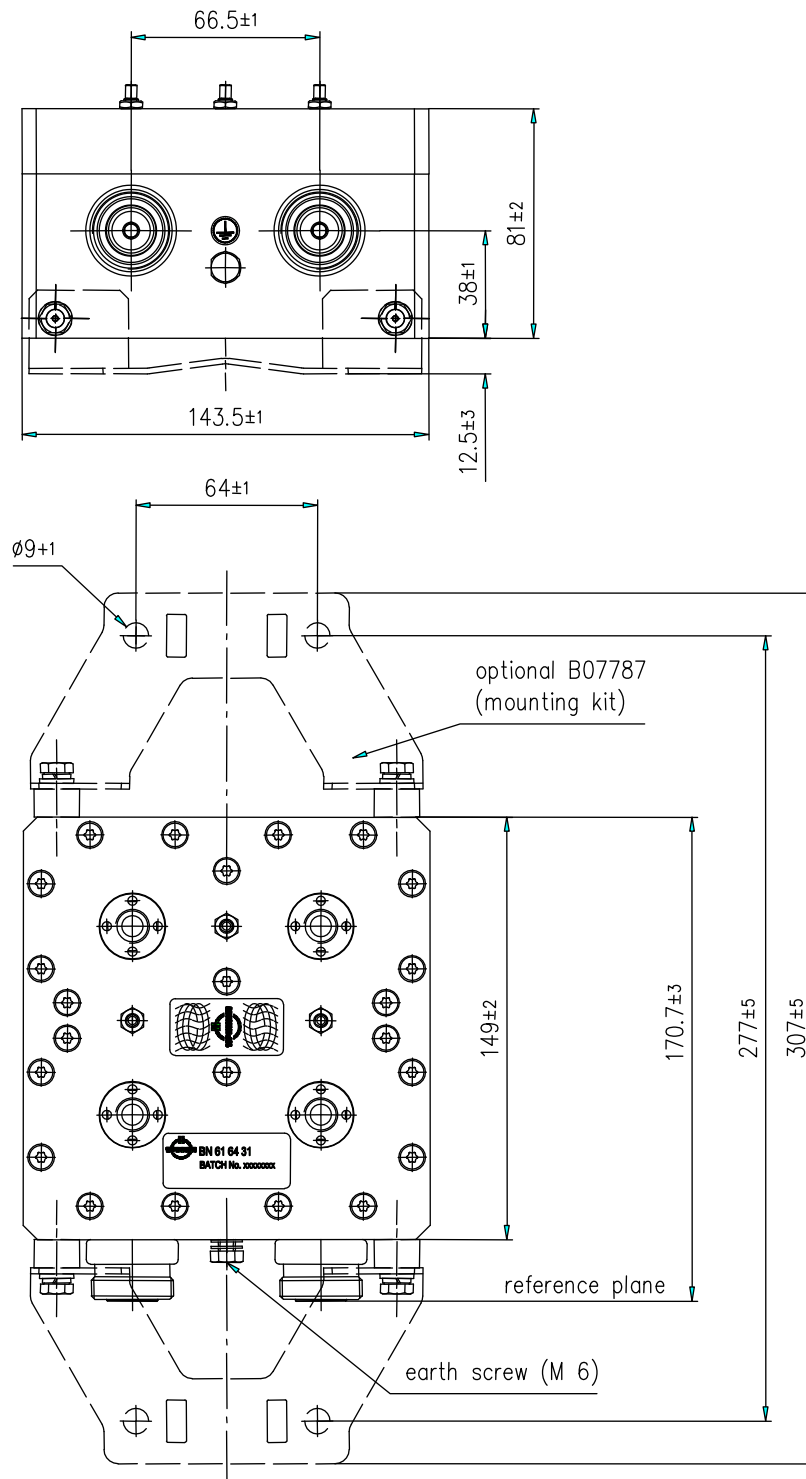


Modifications reserved

VSWR

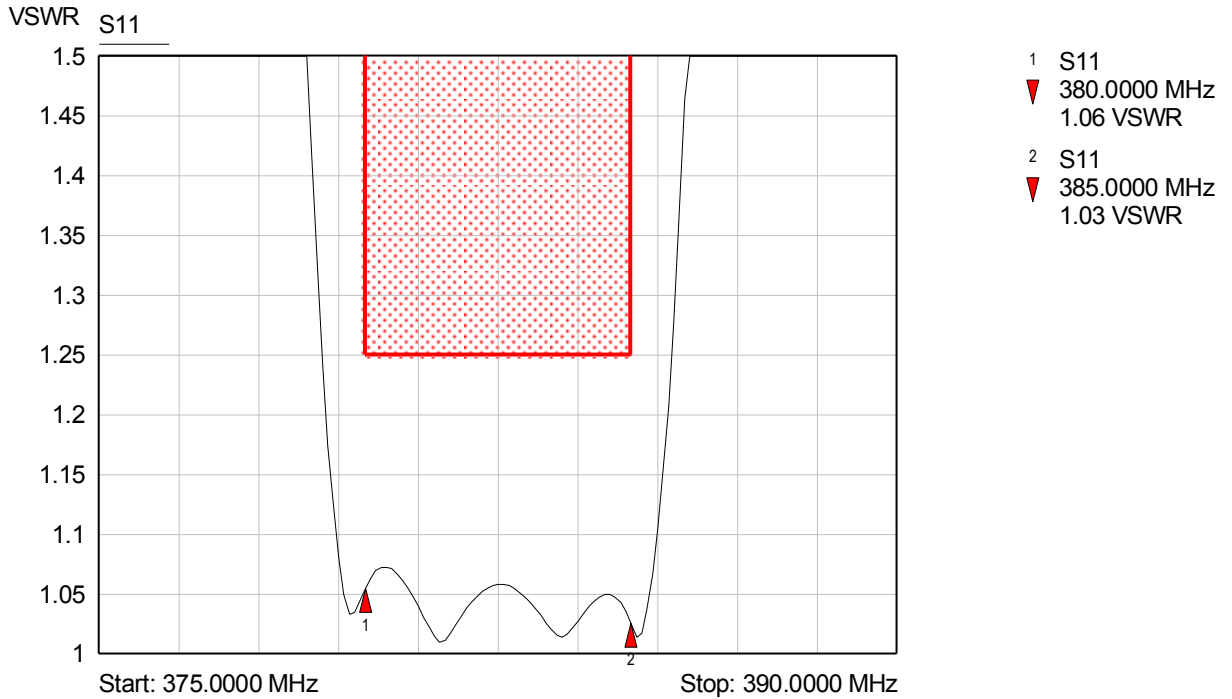

Insertion loss

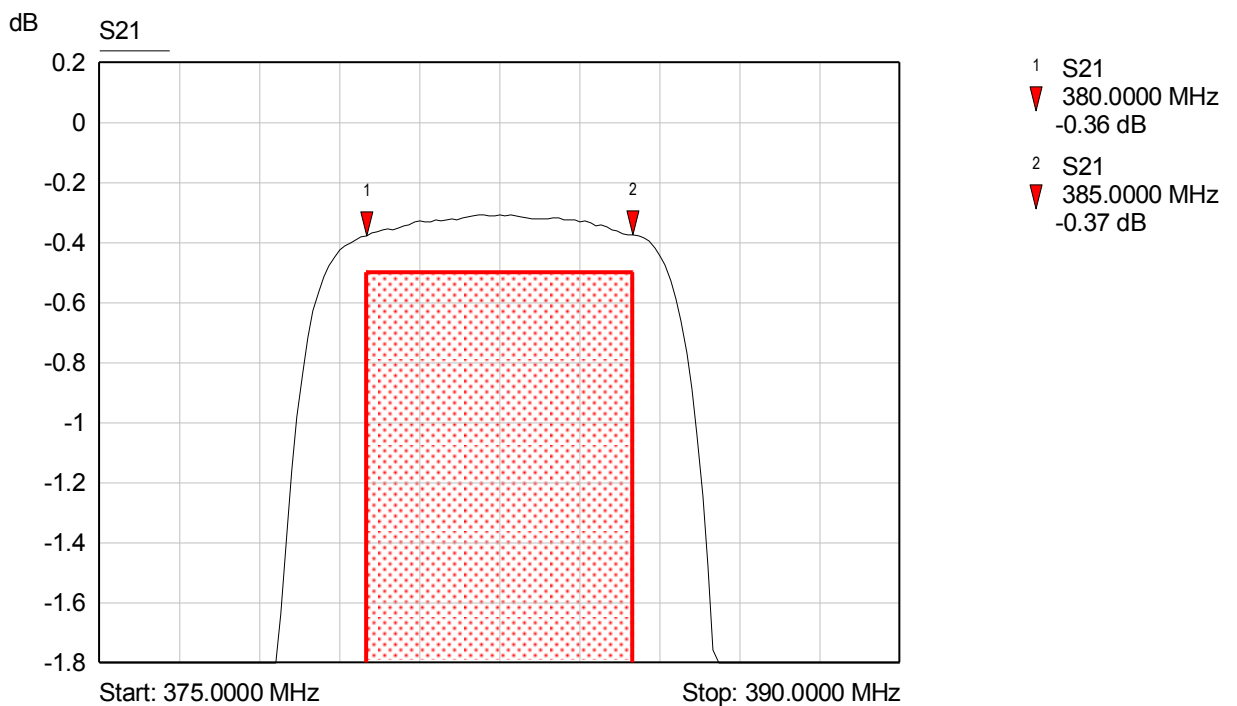

Isolation

