


Waveguide Pressure Window R 70 || BN 660643

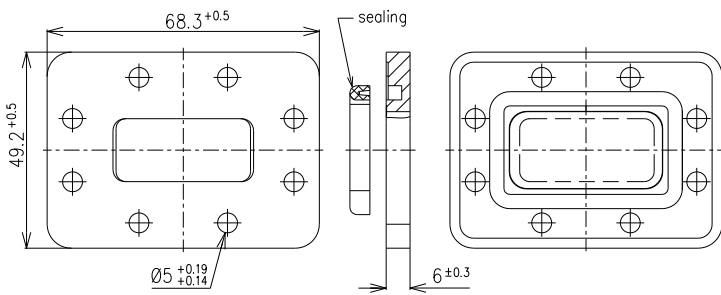

all dimensions in millimeter

Interface type	similar PDR/UDR per IEC 60154-2
Frequency range	5.38 to 8.50 GHz
VSWR, max.	1.03
Material / surface finish	copper alloy / no finish
Other metal parts / surface finish	PI foil / no finish
Sealing	silicone rubber
Differential operating pressure, max.	0.05 MPa (0.5 bar), both-way
Weight, approx.	120 g

SPINNER GmbH  
 This document is proprietary to us.  
 All rights reserved. Any use, transfer, or reproduction of this document  
 or the know-how contained therein requires our express consent.

Template TD-00003G