


CABLE PLUG FOR RG 401/U-TYPE 7-16

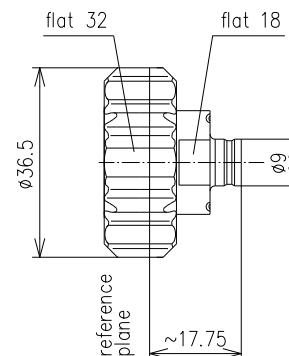

Part number		BN 80 76 21				
Connector type		7-16 plug				
Version		soldered				
Impedance		50 Ω				
Frequency range		0 - 1 GHz	1 - 2 GHz	2 - 4 GHz	4 - 5 GHz	5 - 6 GHz
VSWR	RG 401/U	≤ 1.02	≤ 1.03	≤ 1.05	≤ 1.08	≤ 1.08
	semirigid flexible 250-50	≤ 1.02	≤ 1.03	≤ 1.05	≤ 1.08	≤ 1.14
Intermodulation (IM3) 2x20W		≤ -165 dBc				
Proof voltage		1.8 kV				
Material and surface						
Inner conductor		copper alloy			silver-plated	
Outer conductor		copper alloy			silver-plated	
Other metal parts		copper alloy			bright nickel-plated	
Insulation		PTFE				
Sealing		silicone rubber				
Degree of protection		IP68 (mated)				
Cable compatibility		RG 401/U, semirigid flexible 250				
Standards		IEC 61169-4				
Installation instructions		M30364				
Weight		approx. 0.06 kg				
Included in delivery		installation instructions				
Delivery status		inner conductor attached separately				