


Waveguide to Coaxial Adapter || BN 533122

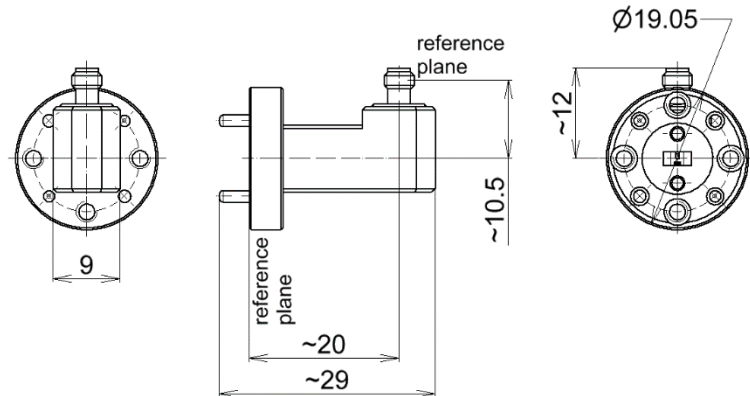

all dimensions in millimeter

Radio frequency characteristics

Waveguide interface aperture	R 620 per IEC 60153-2 (WR 15 per EIA RS-261)
Waveguide interface connector	UFC 620 per IEC 60154-2 compatible to M3922/67-008 (UG-385/U)
Coaxial interface type	1.0 mm socket per IEC 61169-31 (50 Ω)
Frequency range	50 to 75 GHz
Return loss, min. / typ.	16 dB / 20 dB

Mechanical characteristics

Inner conductor material / surface finish	CuBe age hardened / gold-plated
Outer conductor material / surface finish	CuBe / gold plated copper alloy / gold-plated
Other metallic parts / surface finish	stainless steel
Weight, approx.	0.03 kg
Marking	laser engraving

Environmental conditions

Operation	
Ambient temperature range	+18 to +28°C
Relative humidity	95% (non condensing)
Storage	
Ambient temperature range	-40 to +70°C
Relative humidity	95% (non condensing)

Scope of delivery and accessories

Scope of delivery	protective caps, socket-head cap screws no. 4-40 UNC
-------------------	--

SPINNER GmbH
 This document is proprietary to us.
 All rights reserved. Any use, transfer, or reproduction of this document
 or the know-how contained therein requires our express consent.