


Line section; Air Line, bead-supported || BN 533690

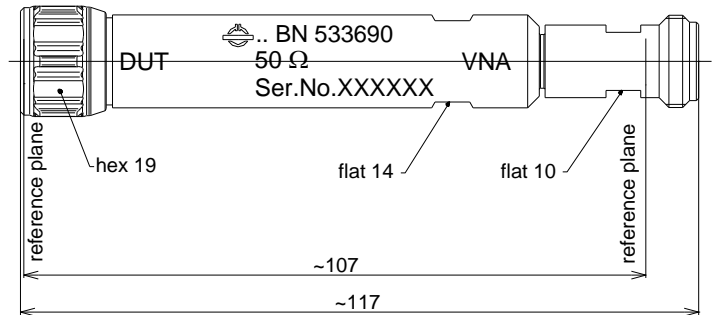

all dimensions in millimeter

Radio frequency characteristics

Interface type	
DUT	N plug per IEC 61169-16
VNA	N socket per IEC 61169-16
Frequency range	DC to 18 GHz
Impedance	50 Ω ± 0.15
VSWR (mated pair of lines, DUT-sides connected, TDR gated)	≤ 1.004 + 0.002 x f [GHz]

Mechanical characteristics

Center conductor material / surface finish	CuBe age hardened / gold-plated
Outer conductor material / surface finish	copper alloy / gold-plated
Insulation	cross linked polystyrene
Other metallic parts / surface finish	copper alloy / CuSnZn-plated
Weight, approx.	0.17 kg

Environmental conditions

Operation	
Ambient temperature range	+18 to +28°C
Storage	
Ambient temperature range	-40 to +70°C

Scope of delivery and accessories

Scope of delivery	protective caps
-------------------	-----------------

This document is proprietary to us. All rights reserved. Any use, transfer, or reproduction of this document or the know-how contained therein requires our express consent.

SPINNER GmbH
 Template TD-00003A