


Precision Adaptor || BN 876781

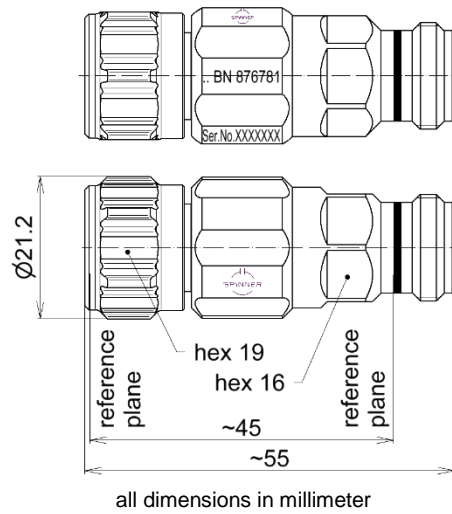

**Radio frequency characteristics**

Interface type	N plug 50 Ω / N socket 75 Ω per IEC 61169-16
Frequency range	DC to 18 GHz
Impedance	50 Ω / 75 Ω (unmatched)

**Mechanical characteristics**

Center conductor material / surface finish	CuBe age hardened / gold-plated
Outer conductor material / surface finish	copper alloy / gold-plated
Insulation	PMP, cross linked polystyrene
Other metallic parts / surface finish	copper alloy / nickel-plated
Weight, approx.	0.09 kg
Marking	laser engraving

**Environmental conditions**

<b>Operation</b>	
Ambient temperature range	+5 to +45°C
<b>Storage</b>	
Ambient temperature range	-40 to +70°C
Relative humidity	95% (non-condensing)

**Scope of delivery and accessories**

Scope of delivery	protective caps
-------------------	-----------------