

Gas Discharge Arrestor
Static sparkover voltage 90 Volt

Sparkover voltage:

- Static (100 V/s) 70 V to 110 V
- Dynamic (1 kV/μs) ≤ 700 V

RF power rating:

(unmodulated; VSWR=1; sea level; 40 °C) ≤ 20 W

Arc (residual) voltage:

≤ 25 V

Allowed surge current:

- Single pulse (8/20 μs) min. 25 kA
- 5 pulses in 3 min. (8/20 μs) min. 20 kA


Isolation resistance:

≥ 1 GΩ

Capacitance:


≤ 1 pF

Free from radioactivity

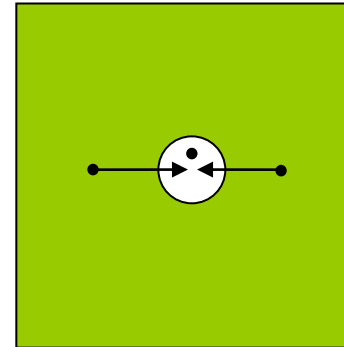

Symbol for Block diagrams

Dimensions:

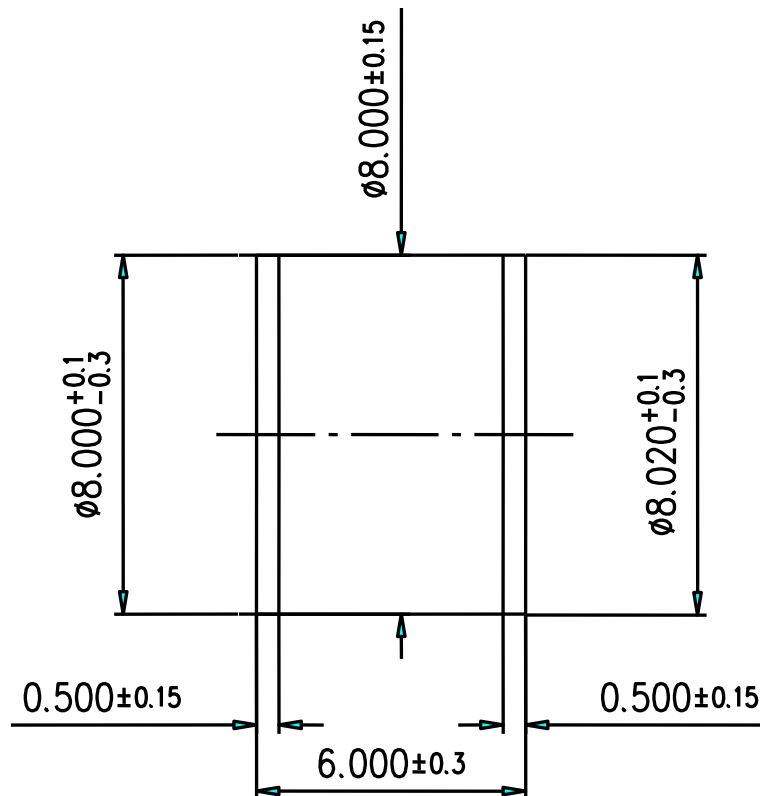

(dimensions in mm)

modifications reserved