
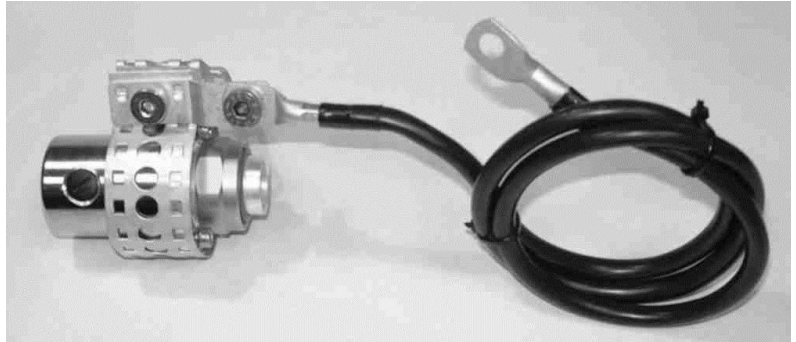


GFG-C-U Grounding Kit for Connectors

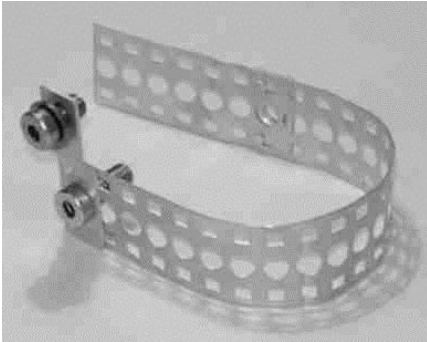

ELECTRICAL SPECIFICATION

Contact resistance	≤ 1 mΩ
Surge current	≥ 100 kA 10/350 μs

MATERIAL

Grounding kit body	tin plated contact
Grounding cable	Encapsulated copper wire 16mm ² , multiple stranded
Cable lug	Copper, tin plated, suitable for M8
Mounting material	Stainless steel

FEATURES

Compatibility	Connectors for 1/4" - 2 1/4" cables
Length of grounding cable	500 mm 1.65 ft
Temperature range	-40°C to +85°C -40°F to 185°F