

ARTICULATED LINE || BN 533645Cxxxx



Versions:

- plug / plug
- plug / socket
- socket / socket

Version plug / socket

Radio frequency characteristics of articulated line

Interface type	N per IEC 61169-16						
Frequency range	DC to 18 GHz						
Impedance	50 Ω						
	26 dB @ DC to 4 GHz						
Return loss, min.	17 dB @ 4 to 9 GHz						
	15 dB @ 9 to 18 GHz						
Phase stability of S ₁₁ and/or S ₂₂ (at any movement)	±1.9 deg. @ DC to 18 GHz						
Amplitude stability of S ₁₁ and/or S ₂₂ (at any movement)	±0.07 dB @ DC to 18 GHz						
Phase stability of S ₁₂ and/or S ₂₁ (at any movement)	±0.5 deg. @ DC to 18 GHz						
Amplitude stability of S ₁₂ and/or S ₂₁ (at any movement)	±0.05 dB @ DC to 18 GHz						
Insertion loss, max.	2.7 dB @ DC to 18 GHz						
Power rating, max.	2.5 W						



ARTICULATED LINE || BN 533645Cxxxx

Radio frequency characteristics of port saver

Interface type	N plug / socket per IEC 60169-16					
Frequency range	DC to 18 GHz					
Impedance	50 Ω					
	38 dB @ DC to 4 GHz					
Return loss, min.	34 dB @ 4 to 8 GHz					
	28 dB @ 8 to 18 GHz					

General mechanical data

Center conductor material / surface finish	CuBe age hardened, CuBe, copper alloy / gold-plated				
Outer conductor material / surface finish	CuBe age hardened, CuBe, copper alloy / gold-plated				
Insulation	cross linked polystyrene, PMP				
Other metallic parts / surface finish	CuBe / CuSnZn-plated copper alloy / gold-plated copper alloy / nickel-plated stainless steel				
Typical flex cycles	1.000.000				
Weight articulated line, approx.	0.35 kg				
Weight port saver, approx.	0.09 kg				

General environmental conditions

Temperature range	-55 to +85°C		
Relative humidity, max.	95% (non condensing)		


Scope of delivery and accessories

Scope of delivery	storage case, data sheet, handling instructions
	available configurations see Table 1)




ARTICULATED LINE || BN 533645Cxxxx

Outline (all dimensions in millimeter)

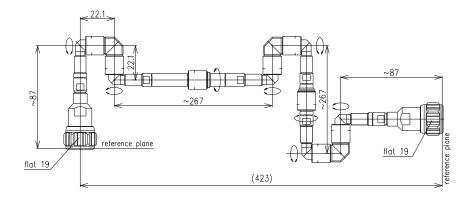


possible variations of mechanical alignment



from the centre of a globe with radius $\sim\!\!500$ every position is reachable

maximum reachable length from reference plane to reference plane ${\sim}650$ mm.

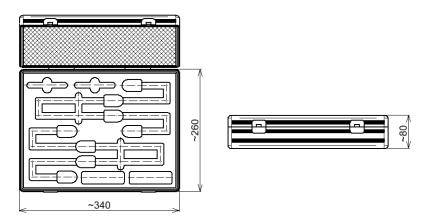

Available configurations:

Table 1)

Connector size	Line 1 gender combination	Line 2 gender combination	Port Saver 1 gender combination	Port Saver 2 gender combination	Order number
N	(m)/(m)	-	(m)/(f)	-	533645C1010
N	(m)/(m)	(m)/(m)	(m)/(f)	(m)/(f)	533645C1111
N	(m)/(f)	-	(m)/(f)	-	533645C2010
N	(m)/(f)	(m)/(f)	(m)/(f)	(m)/(f)	533645C2211
N	(f)/(f)	-	(m)/(f)	-	533645C3010
N	(f)/(f)	(f)/(f)	(m)/(f)	(m)/(f)	533645C3311