


CABLE SOCKET FOR LF 1/2"-50-TYPE 7-16

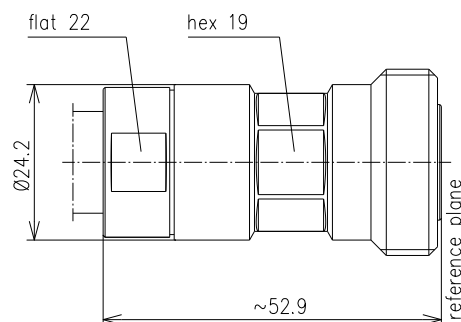

<b>Part number</b>	<b>BN 65 43 17</b>			
Connector type	7-16 socket			
Version	MultiFit™			
Impedance	50 Ω			
Frequency range	0 - 1 GHz	≤ 1 - 2.7 GHz	≤ 2.7 - 3.8 GHz	≤ 3.8 - 6 GHz
VSWR	≤ 1,02	≤ 1.03	≤ 1.06	≤ 1.1
<b>Material and surface</b>				
Inner conductor	copper alloy		silver-plated	
Outer conductor	copper alloy copper alloy		CuSnZn-plated silver-plated	
Other metal parts	copper alloy copper alloy		Sn-plated bright nickel-plated	
Insulation	PTFE, PE			
Sealing	silicone rubber, EPDM			
Degree of protection	IP68 (mated)			
Cable compatibility	Spinner	SPINNERFlex™ LF1/2"-50		
	Acome	HPL50-1/2 F		
	Andrew	LDF4-50A		
	Draka	RFA 1/2"-50		
	Eupen	EC4-50		
	Hansen	RF 50 1/2"		
	Hengxin	HCAAY-50-12		
	Leoni	FlexLine 1/2"R		
	LS Cable	HFC 12D Flexible Foam		
	RFS	LCF 12-50, LCF 12-50L		
Standards	IEC 61169-4			
Installation instructions	M32130			
Included in delivery	cutting guide, installation instructions			